


Model CDO

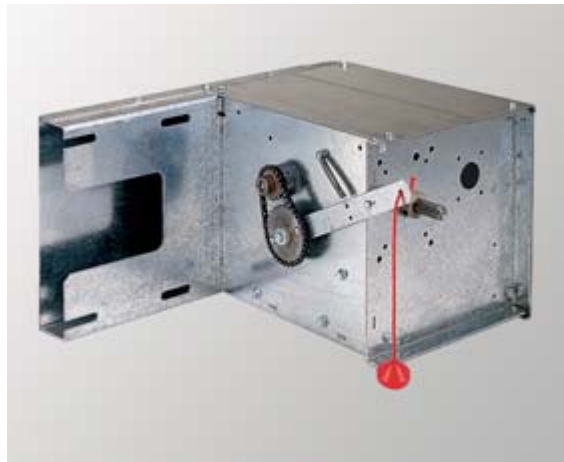

Model CDO is a gear-reduced commercial operator with a 1/2 HP motor. The CDO operator may be used for doors up to 140 sq. ft. (13006 sq. mm). Mounting is front-of-hood only.

UL Listed Standard Voltages

1/2HP 115VAC single phase

Standard Features

- Momentary or Constant contact models
- Driven limit switches synchronized with the door.
- Primary reduction helical gear, secondary hardened bevel gear.
- Governor, centrifugal drum type. (Fire Door Model)
- Release - spring loaded for automatic release by optional fuse link, Fire Sentinel™ or other fire detection system. (Fire Door Model)

Standard Electrical Features

- Instant reversing continuous duty motor with automatic thermal overload reset.
- Dual relay control board.
- 24-volt (D.C.) control standard.
- Rated at 5 cycles per hour
- Momentary contact models have open, closed, stop pushbutton.
- Constant contact models have open and close pushbutton.
- Prewired to accept external sensing devices such as sensing edges or photocells. (Momentary contact models only)

Options

- Crank Operation. (Model CDO only)
- Fire Sentinel™. (Model CDO Fire Door only)